

16. The contactor arrangement as claimed in claim 5, wherein the contactors each include one front face and one rear face, opposite the front face, and wherein the rear faces and the blocking element holder end flush with one another.

17. The contactor arrangement as claimed in claim 5, wherein the blocking element holder is arranged at least partially recessed in the contactors.

18. The contactor arrangement as claimed in claim 17, wherein the side surfaces are adjacent to one another. --

REMARKS

Claims 1-18 are now present in this application, with new claims 12-17 being added by the present Preliminary Amendment. It should be noted that the amendments to original claims 1-11 of the present application are non-narrowing amendments, made solely to place the claims in proper form for U.S. practice and not to overcome any prior art or for any other statutory considerations. For example, amendments have been made to broaden the claims; remove reference numerals in the claims; remove the European phrase "characterized in that"; remove multiple dependencies in the claims; and to place claims in a more recognizable U.S. form, including the use of the transitional phrase "comprising" as well as the phrase "wherein". Other such non-narrowing amendments include placing apparatus-type claims (setting elements forth in separate paragraphs) in a more recognizable U.S. form. Again, all amendments are non-narrowing and have been made solely to place the claims in proper form for U.S. practice and not to overcome any prior art or for any other statutory considerations.

SUBSTITUTE SPECIFICATION

In accordance with 37 C.F.R. §1.125, a substitute specification has been included in lieu of substitute paragraphs in connection with the present Preliminary Amendment. The substitute specification is submitted in clean form, attached hereto, and is accompanied by a marked-up version showing the changes made to the original specification. The changes have been made in an effort to place the specification in better form for U.S. practice. No new matter has been added by these changes to the specification. Further, the substitute specification includes paragraph numbers to facilitate amendment practice as requested by the U.S. Patent and Trademark Office.

CONCLUSION

Accordingly, in view of the above amendments and remarks, an early indication of the allowability of each of claims 1-18 in connection with the present application is earnestly solicited.

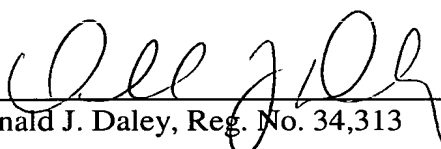
Should there be any outstanding matters that need to be resolved in the present application, the Examiner is respectfully requested to contact Donald J. Daley at the telephone number of the undersigned below.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 08-0750 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

HARNESS, DICKEY & PIERCE, P.L.C

By:


Donald J. Daley, Reg. No. 34,313

P.O. Box 8910
Reston, Virginia 20195
(703) 390-3030

DJD:kna

SUBSTITUTE SPECIFICATION#5
Sub Spec
L. H. H. H.
9-2002

Description

CONTACTOR ARRANGEMENT ~~contactor arrangement~~

[0001] This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/DE00/03296 which has an International filing date of September 21, 2000, which designated the United States of America, the entire contents of which are hereby incorporated by reference.

Field of the Invention

[0002] The present invention generally relates to a contactor arrangement having two contactors and a blocking element. In one aspect,

— ~~with the contactors~~ include ~~having~~ guides for contact supports,

— ~~with a~~ the blocking element being deflected from an intermediate position to a blocking position by the guide of the operated contactor when one of the contactors is operated. ~~The which~~ blocking position may prevents operation of the unoperated contactor.

— ~~with~~ Further, the guide of the unoperated contactor may acting in an operating region on the blocking element if an attempt is made to operate the unoperated contactor. In addition, and

— ~~with the guides~~ may acting directly on the blocking element.

Background o the Invention

[0003] Contactor arrangements ~~such as these~~ are known, for example, from DE 195 48 480 C1 or DE 24 40 361 A1.

[0004] EP 0 313 954 A1 discloses a contactor arrangement having two contactors and a blocking element. ~~in which~~ The contactors have guides for contact supports. The blocking element is deflected from an intermediate position to a blocking position by the guide of the operated contactor when one of the contactors is operated. ~~which~~ The blocking position prevents operation of the unoperated contactor. ~~The~~ The guide of the unoperated contactor acts in an operating region on the blocking element if an attempt is made to operate the unoperated contactor. The guides act directly on the blocking element via pins.

[0005] Electrical loads are often connected to a supply network in different ways.

One example of such types of connection is the optional connection of a load in star or delta to a three-phase network or to a reversing circuit, in which either the polarity of the DC voltage is reversed or a three-phase network is connected to a load alternatively with a positive phase sequence and a negative phase sequence.

[0006] The electrical load is generally connected to the supply network via contactors. If both contactors were operated at the same time, this would result in a short between the phases. Such simultaneous operation of both contactors must therefore be prevented. In known arrangements~~the prior art~~, this is achieved by the contactor arrangements that have been mentioned.

[0007] If repeated attempts are made to operate the unoperated contactor, fatigue occurs over the course of time in the blocking elements ~~used in the prior art~~ mentioned previously~~initially~~. Finally, they break, so that they can no longer carry out their function.

[0008] In the contactor arrangement according to EP 0 313 954 A1, the blocking element is coupled to the movement of the contact supports via pins, which are inserted at the side into the contact support guide. The movement of the contact supports is thus transmitted to the blocking element via the pins. When the blocking element is in the blocking position, then the movement of the contact support is blocked via the pin. This likewise prevents the unoperated contactor from being operated. In practice, it has been found that the high forces that occur result in the pins breaking off. The pins thus represent a weakness in this contactor arrangement.

SUMMARY OF THE INVENTION

[0009] ~~An~~The object of an embodiment of the present invention is to provide a contactor arrangement in which the guides act directly on the blocking element, and in which no fatigue nevertheless occurs in the blocking element.

[0010] Such an ~~The~~ object may be achieved wherein~~in that~~ essentially only compression forces occur in the blocking element as a result of any attempt to operate it.

[0011] An embodiment of ~~t~~The invention is based on the knowledge that fatigue in the blocking elements or the pins is caused by tensile and/or bending stresses. If the stress is essentially purely compressive, on the other hand, virtually no material fatigue occurs.

[0012] An essentially purely compressive stress can be produced particularly easily if, when an attempt to operate it is made, the blocking element is pressed underneath the operating region against at least one stop, so that the blocking

element is supported on the at least one stop during the attempt to operate it.

[0013] If, in addition, essentially only compression forces occur in the guide of the unoperated contactor when an attempt is made to operate it, virtually no material fatigue occurs in the guide of the unoperated contactor, either.

[0014] The contactor arrangement has a particularly simple design if side surfaces of the contactors face one another, the blocking element is arranged in a blocking element holder, and the blocking element holder is arranged between the contactors.

[0015] The creation of essentially only compression forces in the guide of the unoperated contactor can be achieved, in design terms, particularly easily if the blocking element can pivot in a pivoting plane which runs at right angles to the side surfaces.

[0016] The mechanical design becomes even simpler if the guides act on the blocking element in an operating direction, and the operating direction runs parallel to the side surfaces.

[0017] If the blocking element holder is arranged at least partially recessed in the contactors, the contactor arrangement occupies only a small amount of space. The occupied space is a minimum when the side surfaces are adjacent to one another.

[0018] If the contactors each have one front face and one rear face, which is opposite the front face, and the rear faces and the blocking element holder end flush with one another, this necessarily results in the blocking element being positioned in a defined manner. There is no longer any need for adjustments.

[0019] If the blocking element is in the form of a rotating cardioid, the blocking element operates particularly reliably.

[0020] In principle, the contactors may be of any desired configuration. Generally, however, at least three load contacts can respectively be operated via the contact supports.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] Further advantages and details result from the following description of an exemplary embodiment. In this case, illustrated in outline form, the drawings include:

Figure 1 shows a contactor arrangement,

Figure 2 shows a detail from Figure 1, in the form of a section, and

Figure 3 shows a blocking element in a blocking element holder, in the form of a section.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] Figure 1 shows two contactors 1. One of the contactors 1 is shown in detail in this case, while the other contactor 1 is illustrated only schematically. The contactors 1 have side surfaces 2 which face one another, and a blocking element holder 3 is arranged between the contactors.

[0023] It is possible to arrange the contactors 1 at a distance from one another. However, preferably the side surfaces 2 are adjacent to one another. In this case in particular, the blocking element holder 3 is arranged completely or partially recessed in the contactors 1. The contactors 1 each have one front face 4 and one rear face 5, which is opposite the front face 4. The rear faces 5 and the blocking element holder 3 end flush with one another.

[0024] The blocking element holder 3 has an unobstructed accommodation width B. A blocking element 6 is arranged in the blocking element holder 3 and has a blocking element width b, which is slightly smaller than the unobstructed accommodation width B.

[0025] As can be seen from Figures 2 and 3, the blocking element is held in the blocking element holder 3 such that it can pivot in a pivoting plane 7. The accommodation width B extends at right angles to this pivoting plane 7. The side surfaces 2 and the pivoting plane 7 are at right angles to one another.

[0026] The contactors 1 have guides 8 for contact supports. At least one load contact can be operated by each of the contact supports. Preferably, even at least three load contacts can be operated via the contact supports. This makes it possible to connect a three-phase network to a load.

[0027] The blocking element 6 shown in Figures 2 and 3 is in the form of a so-called rotating cardioid 6 which has a cardioid tip 9 and operating regions 10. If neither contactor 1 is operated, the rotating cardioid 6 is held by a resetting spring 11 in an intermediate position, which is illustrated in Figures 2 and 3. By way of example, it is assumed in the following text that the left-hand one of the two contactors 1 is now operated first of all, and an attempt is then made to operate the right hand one of the two contactors 1, as well.

[0028] The operation of the left-hand contactor 1 results in its guide 8 being moved in an operating direction x. The operating direction x runs parallel to the side surfaces 2 and parallel to the pivoting plane 7. The operation of the left-hand guide 8 results in the cardioid tip 9 of the blocking element 6 being deflected into a holding chamber 12, which is essentially arranged underneath the guide 8 of the right-hand contactor 1. In this position, the blocking element 6 is located in a

blocking position, in which it is impossible to operate the right-hand contactor 1. The guide 8 in this case acts directly on the blocking element 6 in the operating region 10, which is located within the blocking element width b and hence, in particular, also within the accommodation width B .

[0029] If an attempt is now made to operate the right-hand contactor 1 as well, its guide 8 is likewise deflected in the operating direction x . The guide 8 of the right-hand contactor 1 in this case acts directly on the blocking element 6 in the corresponding operating region 10, which is likewise located within the blocking element width b , and is hence also within the accommodation width B . In consequence, the blocking element 6 is pressed against the blocking element holder 3 in the region of the holding chamber 12 and in a central region 13. It is thus supported against the blocking element holder 3 in the region of the holding chamber 12 and the central region 13. This prevents any further movement of the right-hand guide 8, and hence prevents operation of the right-hand contactor 1. The lower face of the holding chamber 12 and the central region 13 thus represent stops 12, 13 arranged underneath the operating region 10.

[0030] The guide 8 of the right-hand contactor 1 exerts an operating force F in the operating direction x onto the blocking element 6 when an attempt is made to operate it. However, since it acts within the accommodation width B , the operating force F acts directly on the blocking element holder 3, that is to say, in particular, without any deflection and hence without any shear forces occurring. Essentially only compression forces, but no tensile forces or shear forces, thus occur, to be precise both in the guides 8 and in the blocking element 6.

[0031] As already mentioned, the contactors 1 may have any desired configuration. In particular, they may be either in the form of air contactors or vacuum contactors. A combination of an air contactor and a vacuum contactor is also possible.

[0032] The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

What is claimed is Patent Claims:

1. (Amended) A contactor arrangement, comprising:

~~having~~ two contactors; ~~(1)~~ and

~~a~~ blocking element ~~(6)~~, wherein

~~with~~ the contactors include ~~(1)~~ ~~having~~ guides ~~(8)~~ for contact supportss, wherein

~~with~~ the blocking element ~~is~~ ~~(6)~~ ~~being~~ deflectable ~~ed~~ from an intermediate position to a blocking position by ~~at~~ the guide ~~(8)~~ of ~~an~~ the operated contactor ~~(1)~~ when one of the contactors ~~(1)~~ is operated, ~~the~~ ~~which~~ blocking position prevents ings operation of ~~an~~ the unoperated contactor ~~(1)~~, wherein

~~with~~ the guide ~~(8)~~ of the unoperated contactor ~~(1)~~ ~~act~~ ing in an operating region ~~(10)~~ on the blocking element ~~(6)~~ if an attempt is made to operate the unoperated contactor ~~(1)~~, and wherein

~~with~~ the guides ~~(8)~~ ~~act~~ ing directly on the blocking element ~~(6)~~, and wherein

~~characterized~~

~~in that~~ essentially only compression forces occur in the blocking element ~~(6)~~ as a result of ~~an~~ the attempt to operate it.

2. (Amended) The contactor arrangement as claimed in claim 1,

wherein ~~characterized~~

~~in that~~, when an attempt is made to operate it, the blocking element ~~(6)~~ is pressed underneath the operating region ~~(10)~~ against at least one stop ~~(12, 13)~~, such that the blocking element ~~(6)~~ is supported on the at least one stop ~~(12, 13)~~ during the operating attempt.

3. (Amended) The contactor arrangement as claimed in claim 1 ~~or~~ 2,

~~characterized~~

~~in that~~ wherein, when an attempt is made to operate it, essentially only compression forces also occur in the guide ~~(8)~~ of the unoperated contactor ~~(1)~~.

4. (Amended) The contactor arrangement as claimed in claim 1, 2 ~~or~~ 3,

~~characterized~~

~~in that~~, wherein ~~the~~ side surfaces ~~(2)~~ of the contactors ~~(1)~~ face one another, wherein ~~in that~~ the blocking element ~~(6)~~ is arranged in a blocking element holder ~~(3)~~, and wherein ~~that~~ the blocking element holder ~~(3)~~ is arranged between the contactors ~~(1)~~.

5. (Amended) The contactor arrangement as claimed in claim 4, wherein

~~characterized~~

~~in that~~ the blocking element ~~(6) can be~~ is pivotable in a pivoting plane ~~(7)~~ which runs at right angles to the side surfaces ~~(2)~~.

6. (Amended) The contactor arrangement as claimed in claim 4 ~~or 5~~, wherein the
~~characterized~~

~~in that the~~ guides (8) act on the blocking element (6) in an operating direction ~~(*)~~, and wherein ~~that~~ the operating direction ~~(*)~~ runs parallel to the side surfaces ~~(2)~~.

7. (Amended) The contactor arrangement as claimed in claim 4, ~~5 or 6~~, wherein
~~characterized~~

~~in that~~ the blocking element holder (3) is arranged at least partially recessed in the contactors ~~(1)~~.

8. (Amended) The contactor arrangement as claimed in claim 7, wherein
~~characterized~~

~~in that~~ the side surfaces ~~(2)~~ are adjacent to one another.

9. (Amended) The contactor arrangement as claimed in ~~one of~~ claims 4 ~~to 8~~, wherein
~~characterized~~

~~in that~~ the contactors (1) each include ~~have~~ one front face ~~(4)~~ and one rear face ~~(5)~~, ~~which is~~ opposite the front face ~~(4)~~, and wherein ~~that~~ the rear faces ~~(5)~~ and the blocking element holder (3) end flush with one another.

10. (Amended) The contactor arrangement as ~~claimed in~~ claim 1, wherein ~~one of the above claims,~~
~~characterized~~

~~in that~~ the blocking element ~~(6)~~ is in the form of a rotating cardioid ~~(6)~~.

11. (Amended) The contactor arrangement as claimed in claim 10, wherein ~~one of the above claims,~~
~~characterized~~

~~in that~~ at least three load contacts can respectively be operated via the contact supports.

New

12. The contactor arrangement as claimed in claim 2,
wherein, when an attempt is made to operate it, essentially only compression forces also occur in the guide of the unoperated contactor.

13. The contactor arrangement as claimed in claim 2, wherein side surfaces of the contactors face one another, wherein the blocking element is arranged in a blocking element holder, and wherein the blocking element holder is arranged

between the contactors.

14. The contactor arrangement as claimed in claim 3, wherein side surfaces of the contactors face one another, wherein the blocking element is arranged in a blocking element holder, and wherein the blocking element holder is arranged between the contactors.

15. The contactor arrangement as claimed in claim 5, wherein the guides act on the blocking element in an operating direction, and wherein the operating direction runs parallel to the side surfaces.

16. The contactor arrangement as claimed in claim 5, wherein the contactors each include one front face and one rear face, opposite the front face, and wherein the rear faces and the blocking element holder end flush with one another.

17. The contactor arrangement as claimed in claim 5, wherein the blocking element holder is arranged at least partially recessed in the contactors.

18. The contactor arrangement as claimed in claim 17, wherein the side surfaces are adjacent to one another.

Abstract

~~Contactor arrangement~~

Two contactors (1) are mutually interlocked via a blocking element (6) which is arranged between the contactors (1). The blocking element (6) ~~in this case~~ interacts with guides (8) on the contact supports of the contactors (1). The guides (8) act directly on the blocking element (6). Only compression forces, but no tensile forces or shear forces, now occur in the blocking element, ~~a (6)~~, as a result of this and as a result of the blocking element (6) being configured in a suitable manner.

FIGURE 2